




LAKO

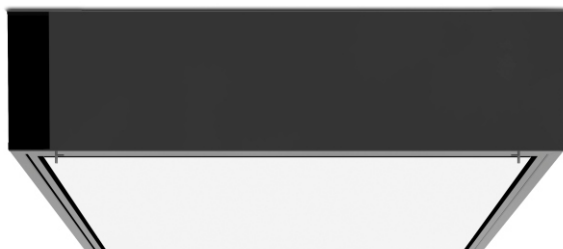

SKYLIGHT N 1200x1200

SKYLIGHT N 1200x1200 LED 3000/4000K 375mA

PL

Rodzaj montażu: nastropowy	Method of installation: mounted on the ceiling
Źródło światła: LED	Light sources: LED
Temperatura barwowa: 3000/4000K	Color temperature: 3000/4000K
Strumień świetlny: 32306/33460lm	Initial luminous flux: 32306/33460lm
Moc: 175W	Initial input power: 175W
Napięcie: 230V	Input Voltage: 230V
Żywotność: 72.000h	Lumen maintenance: 72.000h
Waga: 23kg	Weight: 23kg
Kolor obudowy: RAL	Housing colour: RAL
Sterowanie: opcja	Dimmable: optional

ENG



Biuro PPWK, Rybnik
PPWK office, Rybnik



Biuro 3LOGIC, Kraków
3LOGIC office, Cracow

Tolerancja strumienia świetlnego i mocy +/- 10%
Producent zastrzega sobie możliwość zmian konstrukcyjnych oprawy.
Istnieje możliwość modyfikacji produktu na życzenie Klienta.
Informacje zawarte na karcie katalogowej nie stanowią oferty handlowej ani elementu umowy.
Więcej na temat rodziny produktów, znajduje się na stronie: www.lako.pl

Luminous flux and power tolerance +/- 10%
The manufacturer reserves the right to change the design of the luminaire.
It is possible to modify the product at the customer's request.
The information contained in the catalog card does not constitute a commercial offer or an element of the contract.
More information about the product family can be found at: www.lako.pl



Obudowa w dowolnym kolorze RAL
Housing in any RAL colour